

DESCRIPTION

AMC MODEL DVAT-0518-60-8-SK-196 IS A 0.5 TO 18 GHz VARIABLE ATTENUATOR/MODULATOR WITH 8 BIT BINARY TTL CONTROL OR OPTIONAL ANALOG VOLTAGE CONTROL.

SPECIFICATIONS

- FREQUENCY RANGE: 0.5 TO 18 GHz
- INSERTION LOSS: 4.5 dB MAXIMUM
- ATTENUATION FLATNESS:
 - @ 10 dB = ± 1.0 dB
 - @ 20 dB = ± 1.5 dB
 - @ 40 dB = ± 3.0 dB
 - @ 60 dB = ± 5.5 dB
- ATTENUATION ACCURACY:
 - 0-30 dB = ± 1.0 dB
 - >30-50 dB = ± 1.3 dB
 - >50-60 dB = ± 1.5 dB
- MONOTONICITY: GUARANTEED
- TEMPERATURE VARIATION:
 - ± 2.5dB -10 to 85 deg C Typ
 - ± 3.5dB -40 to 95 deg C Typ
- SWITCHING TIME: 1.5 micro sec MAXIMUM
- SMALL SIGNAL BANDWIDTH: 150 kHz Typ (6dB with ±3 dB sinewave)
- LARGE SIGNAL BANDWIDTH: 75 kHz Typ (30dB with ±30 dB sinewave)
- RETURN LOSS: -12 dB TYP -8.5 dB MAX
- POWER RATING: +20 dBm (see note 1)
- DIGITAL CONTROL: 8 BIT TTL
 - 0.25 dB MINIMUM ATTENUATION STEP
- ANALOG CONTROL option: 0-6V ANALOG VOLTAGE, 10dB/VOLT
- POWER SUPPLY: +12V @ 150 mA MAXIMUM
- CONNECTORS
 - RF INPUT/OUTPUT: FIELD REPLACEABLE SMA (FEMALE)
 - POWER AND CONTROLS: 15 PIN MICRO-D FEMALE MATING CONNECTOR (MALE) FURNISHED
- SIZE: 2.00" x 1.81" x 0.50"

OPTIONS:

- A05 +15V POWER SUPPLY



ENVIRONMENTAL RATINGS

- TEMPERATURE -40°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY MIL-STD-202F, METHOD 103B COND. B
- SHOCK MIL-STD-202F, METHOD 213B COND. B
- VIBRATION MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE MIL-STD-202F, METHOD 107D COND. A

NOTE: THE ABOVE SPECIFICATION ARE SUBJECT TO CHANGE OR REVISION.

* Units are designed to meet Environmental ratings but not tested. If Environmental Testing is required, please contact Sales Department.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	Original Release	08/09/07	
	A	SEE ECR# 09-004	1/22/09	
	B	SEE ECR# 09-025	6/8/09	<i>lf</i>

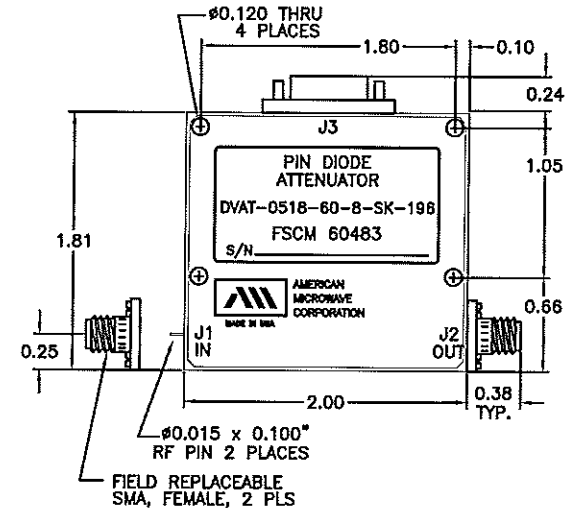

NOTES

1. Low Frequency reduced power performance refer to test report.
2. Negative supply only for compatability with previous models.
3. Negative supply may be -V, or Ground or Open Circuit.
4. SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE.
5. SPECIFICATIONS SUBJECT TO CHANGE OR REVISION.

STANDARD PIN NUMBERING	
PIN	FUNCTION
8	GND
7	Option: Latch En
6	Option: Analog I/P
5	GND
4	0.25 dB (LSB)
3	0.5 dB
2	1 dB
1	2 dB
15	4 dB
14	8 dB
13	16 dB
12	32 dB (MSB)
11	+12VDC
10	Not Used
9	Not Used

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

AMERICAN MICROWAVE CORPORATION

7311-G GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-4700 FAX: 301-662-4938
WEBSITE: www.americanmicrowavecorp.com
E-MAIL: sales@americanmicrowavecorp.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>SPK</i>		08/09/07	PRODUCT FEATURE DVAT-0518-60-8-SK-196 OPTION: 0.5-18 GHz, VARIABLE ATTENUATOR			
CHECKED <i>lf</i>		6/10/09	SIZE	FSCM NO.	DWG NO.	REV.
ISSUED			A	60483	100-D001-001	B
SCALE N:S			SHEET 1 OF 4			