


DESCRIPTION

AMC MODEL G-DVAN-1020-60-8 IS A 1.0 TO 2.0 GHz 8 BIT PIN DIODE ATTENUATOR HAVING AN INSERTION LOSS OF 2.0 dB MAXIMUM AND A VSWR OF 2.0:1 MAXIMUM.

SPECIFICATIONS

- FREQUENCY RANGE: 1.0 – 2.0 GHz
- INSERTION LOSS: 2.0 dB MAXIMUM
- VSWR: 2.0:1 MAXIMUM
- FLATNESS:
 - ① 10 dB: ± 0.5 dB MAXIMUM
 - ② 20 dB: ± 1.1 dB MAXIMUM
 - ③ 40 dB: ± 1.5 dB MAXIMUM
 - ④ 60 dB: ± 1.6 dB MAXIMUM
- ACCURACY:
 - 0–30 dB: ± 0.5 dB MAXIMUM
 - >30–50 dB: ± 1.0 dB MAXIMUM
 - >50–60 dB: ± 1.5 dB MAXIMUM
- MONOTICITY: GUARANTEED
- TEMPERATURE COEFFICIENT: ±0.025 dB/°C
- SWITCHING SPEED: 1 uSec MAXIMUM (SEE NOTE)
- RF POWER RATINGS: +20 dBm (OPERATING), +30 dBm (SURVIVAL)
- CONTROL: 8-BIT POSITIVE TRUE BINARY
- DC POWER SUPPLY: +12V @ 150mA
- CONNECTORS:
 - REMOVABLE SMA FEMALE FOR RF
 - 15-PIN MULTIPIN FOR POWER AND CONTROL

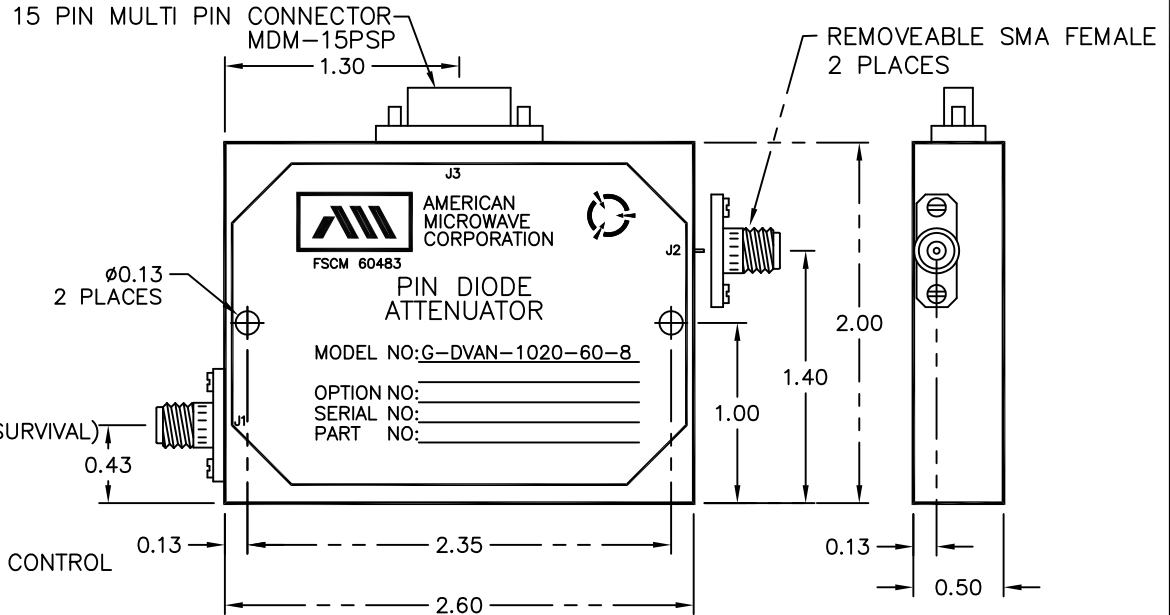

NOTE:

1. FOR 500ns SWITCHING SPEED, FLATNESS WILL INCREASE

ENVIRONMENTAL RATINGS

- **TEMPERATURE:** -40°C TO +85°C (OPERATING)
..... -65°C TO +125°C (STORAGE)
- **HUMIDITY:** MIL-STD-202F, METHOD 103B COND. B
- **SHOCK:** MIL-STD-202F, METHOD 213B COND. B
- **VIBRATION:** MIL-STD-202F, METHOD 204D COND. B
- **ALTITUDE:** MIL-STD-202F, METHOD 105C COND. B
- **TEMPERATURE CYCLE:** MIL-STD-202F, METHOD 107D COND. A

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

* Units are designed to meet Environmental ratings but not tested. If Environmental Testing is required, please contact Sales Department.

J3 PIN FUNCTION	
PIN	FUNCTION
1	N/C
2	N/C
3	N/C
4	GND
5	0.25 dB (LSB)
6	0.5 dB
7	1 dB
8	2 dB
9	4 dB
10	8 dB
11	16 dB
12	32 dB (MSB)
13	+12V
14	N/C
15	N/C

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	6/9/09	
	B	SEE ECN# 12-007	2/9/12	Rd

AMERICAN MICROWAVE CORPORATION

7311-G GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-4700 FAX: 301-662-4938
WEBSITE: www.americamicrowavecorp.com
E-MAIL: sales@americamicrowavecorp.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN	<i>K. J. M. M. P.</i>	6/9/09	PRODUCT FEATURE G-DVAN-1020-60-8 1.0 – 2.0 PIN DIODE ATTENUATOR		
CHECKED			SIZE	FSCM NO.	DWG NO.
ISSUED			A	60483	100-7854
			SCALE	N:S	SHEET 1 OF 1
			REV.	B	